

Series 59

3-Piece Full Port Ball Valves

Offer maximum flow capacity, minimum pressure loss
And optional fire safe design

VALBOL Series 59 three-piece ball valves. A major design, and testing program brings you a valve designed to ANSI B16.34 specifications with advanced seal technology.

Series 59 valves are also available in a fire safe configuration F59 In sizes up to 2".

Series 59 valves are available with flanged ANSI class 150 & 300.

The stem seal design, consisting of a variety of optional materials Like live-loaded PEEK and C/Fill thrust bearings and seals which Significantly increases valve cycle life over conventional ball valves and extends time between adjustments.



Multiple End Connections, Seat And Seal Combinations

Features which make this tough reliable ball valve so unique include tight shut-off, smooth two-way flow, advanced seat materials, a variety of interchangeable end connections, swing away three-piece construction.

A variety of pipe ends, including socket weld, screw ends, butt weld or any combination of these, enables Series 59 valves to be adapted to fit standard and more unusual piping situations. Series 59 valves can also be welded in place, fully assembled with "G" graphoil, "S" PTFE coated stainless steel body seals, reinforced PTFE, C/Fill, or Peek seats.

The range of seat materials includes PTFE, Reinforced TFE, C/Fill, Delrin, Metal, Peek and UHMWPE. These seats easily handle a great majority of industrial fluids with temperatures from -50°F to +600°F including steam, chemicals, petrochemicals, petroleum products, caustics and fluids containing solids or fibers and or abrasive materials.

Swing – Out Design for Easy In Line Maintenance

The Series 59 is especially suited for use in piping systems where line breaks are required and total entry into the line is necessary. The centre section can swing out, eliminating the need to cut a valve out of line and having to replace both the valve and the pipe. Because of this design, the seats, seals and ball can all be replaced quickly and easily without disturbing pipe alignment. Acting as both a valve and a union,

Bi-Directional Sealing

Series 59 three-piece ball valves are designed to seal bi-directionally against resilient seats. The relief slots assist in downstream sealing and reduce torque. The ball is forced to the downstream side under pressure and forced against the downstream seat to effect and maintain a seal. Consequently, the valve will give bubble-tight shut-off throughout a long in-service life even with seats of relatively non-resilient materials such as PTFE or C/Fill. The seats are also designed to perform a wiping action during each cycle cleaning foreign materials off both the seat and ball, assuring leak-tight sealing. The downstream sealing of VALBOL three-piece valves overcomes the two most common difficulties in the use of conventional ball valves: seat damage and high operating torque. A hole in the stem slot prevents any possibility of damage due to trapped cavity pressure when the ball is open. An optional ball cavity vent is available for specific applications. The Worcester design results in smoother, more efficient valve operation.


Automation

VALBOL offers a complete line of pneumatic and electric automation packages for Series 59 valves. Both pneumatic and electric packages are offered for on/off or proportional control. Available options include:

- Top mounted limit switches
- Proximity switches
- Single and double acting pneumatic actuators
- TYPE 4, 4x, 7 and 9 enclosures
- Remote position indication
- Positioners

Cv Data & Seat Pressure/Temperature Ratings


Valve Size	Cv (USGPM)
1/2"	32
3/4"	54
1"	105
1.1/2"	275
2"	460
2.1/2"	780
3"	1330
4"	2420

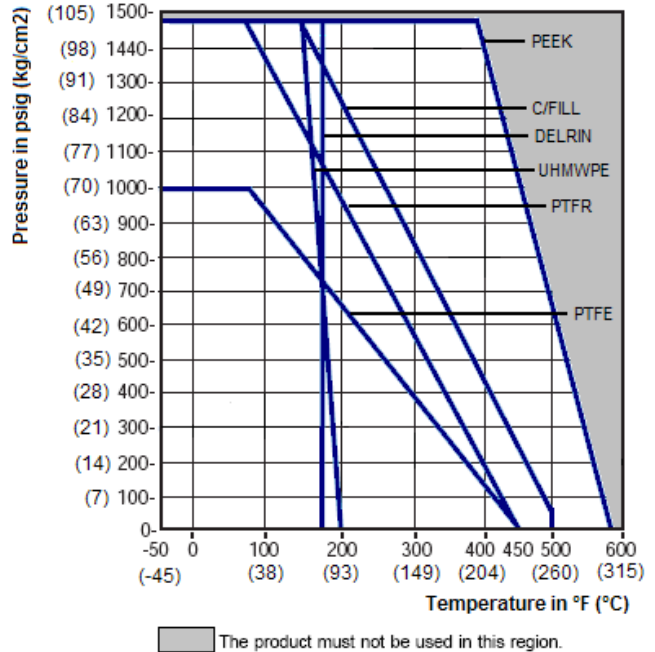


Part identification and Materials

- 01 – Valve Body, Brass, Carbon Steel, Stainless Steel
- 04 – Pipe Ends, Brass, Carbon Steel, Stainless Steel
- 05 – Ball, Stainless Steel, Monel, Alloy 20, Hastelloy C
- 06 – Seats, Delrin, Peek.
- 07 – Stem, Stainless Steel.
- 08 – Body Seals, Buna.

- 09 – Thrust Bearing, RTFE.
- 11 – Stem Seal Follower, 316 St.St.
- 12 – Stop Plate
- 13 – Retaining Nut, CS plated
- 14 – Handle, CS plated
- 20 – Body Bolts, B7
- 22 – Body Nuts, Gr. 2h.

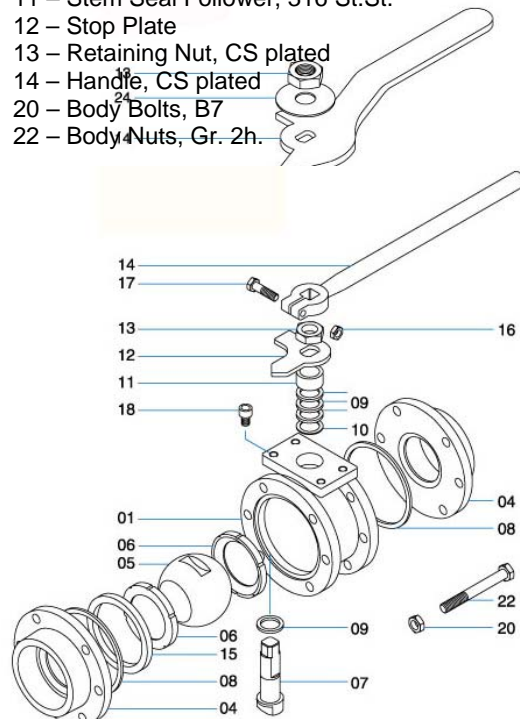

Dimensions

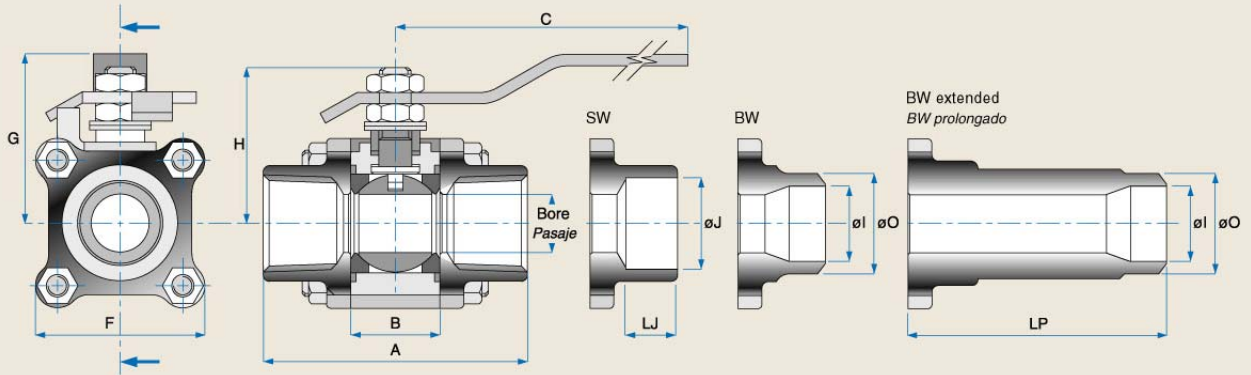


Threaded, SW or BW ends. Extremos roscados para soldar a tope o enchufe.

Model 59. Modelo 59.

Ball valve, three piece design, full bore blowout-proof stem. Válvula Esférica de Pasaje Total, de 3 Piezas con Vástago Inexpulsable.

Dimensions. Dimensiones.

Size Tamaño	Bore Pasaje	A	B	C	F	G	H	øJ	LJ	LP	øO	Sch 5 øI	Sch 10 øI	kg
1/4"	0.44	2.25	0.81	4.25	1.75	1.81	1.50	0.55	0.44	3.72	0.55	-	0.41	0.52
DN 8	11.2	57.2	20.7	108.0	44.5	46.0	38.1	14.1	11.2	94.5	14.0	-	10.3	
3/8"	0.44	2.25	0.81	4.25	1.75	1.81	1.50	0.69	0.44	3.72	0.67	-	0.55	0.52
DN 10	11.2	57.2	20.7	108.0	44.5	46.0	38.1	17.5	11.2	94.5	17.0	-	13.9	
1/2"	0.56	2.79	0.97	4.25	2.00	1.88	1.62	0.85	0.44	4.02	0.84	0.71	0.67	0.71
DN 15	14.2	70.7	24.6	108.0	50.8	47.8	41.2	21.7	11.2	102.2	21.3	18.0	17.1	
3/4"	0.81	3.72	1.25	5.75	2.38	2.44	2.19	1.07	0.56	4.19	1.05	0.92	0.88	1.34
DN 20	20.6	94.5	31.8	146.0	60.5	62.0	55.6	27.1	14.2	106.4	26.7	23.4	22.2	
1"	1.00	4.22	1.63	5.75	2.62	2.62	2.44	1.33	0.72	4.31	1.31	1.18	1.09	2.08
DN 25	25.4	107.1	41.3	146.0	66.6	66.6	62.0	33.8	18.3	109.5	33.3	30.1	27.8	
1 1/4"	1.25	4.52	1.91	7.00	3.00	3.12	2.81	1.67	0.72	4.86	1.66	1.53	1.44	3.06
DN 32	31.8	114.9	48.4	117.8	76.2	79.3	71.4	42.5	18.3	123.4	42.2	38.9	36.5	
1 1/2"	1.50	4.97	2.22	7.00	3.38	3.31	3.00	1.91	0.72	5.02	1.91	1.77	1.67	3.90
DN 40	38.1	126.4	56.3	177.8	85.9	84.0	76.2	48.6	18.3	127.4	48.5	45.0	42.5	
2"	2.0	5.73	2.85	10.2	4.55	4.79	4.08	2.41	0.84	5.13	2.38	2.24	2.15	8.00
DN 50	50.8	145.6	72.5	260.0	115.5	121.9	103.7	61.1	21.3	130.3	60.5	57.0	54.5	

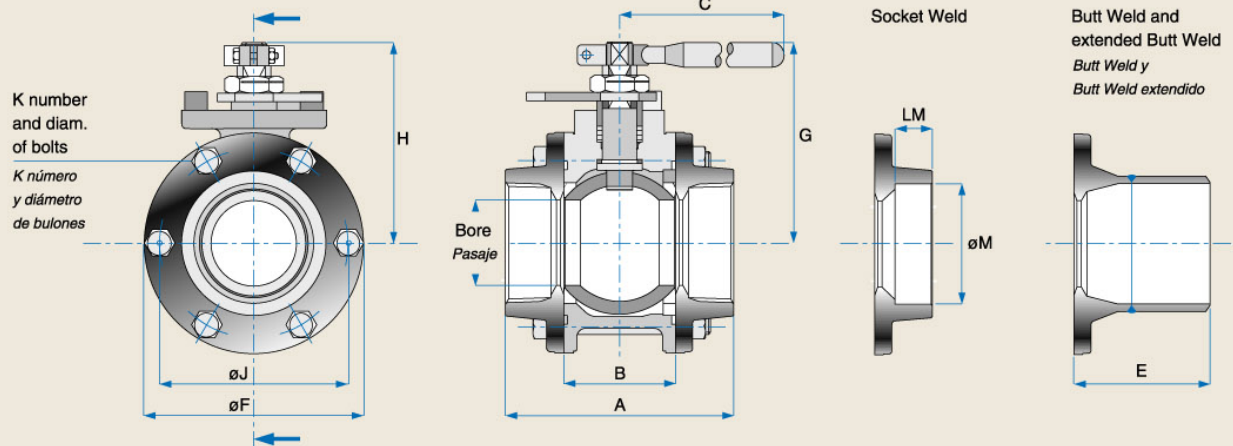

2"	2.00	5.61	2.86	10.24	5.13	5.82	5.13	4.60	4.90	6 x 7/16"	2.41	0.84	6.45
DN 50	50.8	142.7	72.7	260.0	130.3	148.0	128.2	116.8	125.0	UNF	61.1	21.3	
2 1/2"	2.50	6.15	3.28	18.31	4.88	6.44	5.90	5.70	5.51	6 x 1/2"	2.90	1.18	13.60
DN 65	63.5	156.3	83.3	465.0	124.0	163.5	150.0	144.8	140.0	UNF	73.8	30.0	
3"	3.25	7.55	4.28	18.31	4.72	8.12	6.52	6.32	6.87	8 x 9/16"	3.53	1.30	22.80
DN 80	82.5	191.8	108.8	465.0	119.8	206.4	165.5	160.52	174.5	UNF	89.8	33.0	
4"	4.38	11.73	5.75	21.30	4.65	11.13	9.22	8.90	9.37	8 x 3/4"	4.54	1.57	36.40
DN 100	111.1	298.1	146.0	541.0	118.2	282.6	234.2	226.2	238.1	UNF	115.4	39.8	

Ordering Instructions

1 Model	2 Size	3 Options	4 Body	5 Ball & Stem	6 Seat	7 Body Seals	8 Ends	9 Operator
59	02- DN8 (1/4") 03- DN10 (3/8") 05- DN15 (1/2") 07- DN20 (3/4") 10- DN25 (1") 12- DN32 (1.1/4") 15- DN40 (1.1/2") 20- DN50 (2") 25- DN65 (2.1/2") 30 DN80 (3") 40 DN100 (4")	0-Standard 1-More than one A-Antistatic C-Chlorine service E-Steam Service F-Fire Safe G-Locking handle H-High pressure I-Padlocking handle J-Extended stem L-B7 bolting M- W/male threads P-Relief hole Q-Vacuum Service R-Spring return handle S-SS bolting & accs. U-Special handle W-Extended stem (LQ) X-Oxygen service Y-Extended stem (AG) Z-Cryogenic service	1 - Brass 4 - C. Steel 6 - SS316 7 - Monel 8 - SS304 A - Alloy 20 C-Hastelloy C	1- Brass 6 - SS316 7 - Monel 8 - SS304 A - Alloy 20 C -Hastelloy C	C - Metal "V" G - Metal round P - C/Fill PI - Integral C/Fill R - PTFR RI - Integral PTFR T - PTFE TI - Integral PTFE U - Uhmwpe Y - Delrin H - Peek	A - Silicone B - Buna E - EPR G -Graphoil N - Neoprene R - PTFR S - Metal TFE T - PTFE V - Viton	1 - 150RF 3 - 300RF B - BSPT C - Tri-Clamp D - Tank Bottom N - NPT P - BSP S - SW pipe T - SW tube V - BW tube W - BW pipe X - Ext. BW	A - Actuator M - Wrench N - Bare stem

Example

1	2	3	4	5	6	7	8	9
59	15	P	4	6	R	V	N	M



Válvulas Worcester de Argentina S.A.

Oswaldo Cruz 3333 - (C1293DL) Buenos Aires - Argentina

Tel: 54(11)4303-0037 Fax: 54(11)4301-8694

mail:mail@valbol.com Internet: www.valbol.com

Bul. VB59/3 03-2